
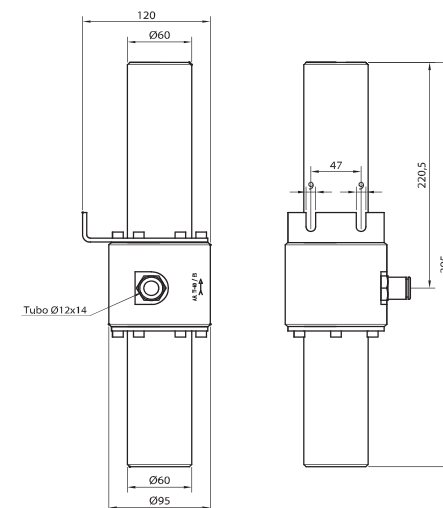
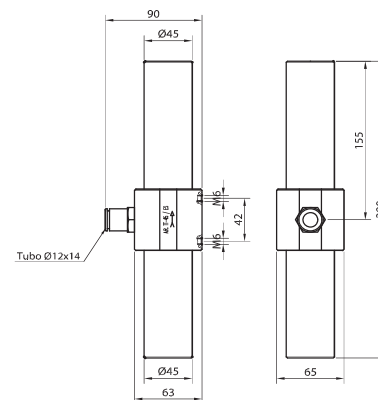




CARACTERÍSTICAS • CHARACTERISTICS

Consumo <i>Consumption</i>	[NL/min]
Caudal de aspiración <i>Suction air flow</i>	[NL/min]
Caudal inducido <i>Induced air flow</i>	[NL/min]
Paso interno <i>Internal hole</i>	[mm]
Depresión máx. <i>Max. vacuum degree</i>	[mbar]
Presión de alimentación <i>Supply pressure</i>	[bar]
Materiales <i>Materials</i>	
Temperatura de trabajo <i>Operating temperature</i>	[°C]
Peso <i>Weight</i>	[g]

CÓMO PEDIR • HOW TO ORDER

Trompa de transporte
Conveying pump

ES	ES12
750	1150
2000	2200
2750	3350
Ø24	Ø24
-160	-225
4 ... 6	4 ... 6
Al, Fe, Bron.	Al, Fe, Bron.
-20 ... 70	-20 ... 70
815	815

TVTT30ES	TVTT30ES12
----------	------------

ES	ES14	ES20
1100	1380	1850
2550	3100	3600
3650	4480	5450
Ø39	Ø39	Ø39
-85	-90	-142
4 ... 6	4 ... 6	4 ... 6
Al, Fe, Bron.	Al, Fe, Bron.	Al, Fe, Bron.
-20 ... 70	-20 ... 70	-20 ... 70
1560	1560	1560

TVTT45ES TVTT45ES14 TVTT45ES20

ES	ES14	ES28
1100	1250	2540
2600	3050	5800
3700	4300	8340
Ø50	Ø50	Ø50
-80	-77	-150
4 ... 6	4 ... 6	4 ... 6
Al, Fe, Bron.	Al, Fe, Bron.	Al, Fe, Bron.
-20 ... 70	-20 ... 70	-20 ... 70
5100	5100	5100

TVTT60ES TVTT60ES14 TVTT60ES28



DEXIS
RP MECATRÓNICA