


G-Series Analog or Start/Stop

Temposonics® GP and GH
Stroke length 50...7600 mm
depends on output

**Document Part Number
551383 Revision A**



- Rugged industrial sensor
- Linear absolute measurement
- Contactless sensing with highest durability
- Enhanced diagnostics and programming capability
- EMC tested and marked with CE
- Superior accuracy: linearity less than 0.02 % F.S.
- Repeatability less than 0.001 % F.S.
- Direct analog output
- Digital start/stop pulse output

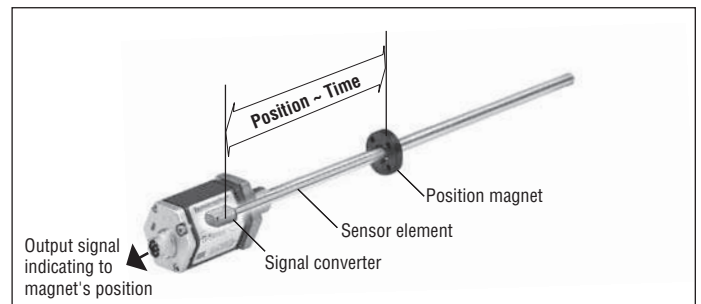

Magnetostriction

The Temposonics® linear position transducers are based on magnetostriction technology. Magnetostriction is a ferromagnetic material phenomenon which relates a dimensional change of the material to its magnetization properties. It is the product of a general coupling between the magnetic and elastic transport properties of the materials crystal lattice. This affect is typically on the scale of a few parts per million. It is quasi linear with the material's magnetization, may be positive or negative, and reaches a maximum at magnetic saturation. It is reversible, but exhibits a hysteretic affect if the magnetization does so. Magnetostriction was characterized in the late 19th century, the longitudinal version is called the „Joule“ effect, the torsional version is called the „Wiedemann“ effect, and the reciprocal effect where mechanical stress changes the magnetic properties is referred to as the „Villari“ effect.

Design

The extremely robust sensor, ideal for continuous operation under harshest industrial conditions is completely modular in mechanic and electronic design.

- A profile or rod-shaped sensor housing protects the sensing element in which gives rise to the measurement signal.
- The sensor head accommodates the complete modular electronic interface with active signal conditioning. Double encapsulation ensures high operating safety and optimum EMC protection.
- The position transmitter, a permanent magnet - fixed at the mobile machine part - drives contactlessly over the sensor's stroke and starts measuring through the housing wall.

Technical data

Input

Measuring variables	position, liquid level
Stroke length	
- Analog	profile/rod models: 50...2500 mm (longer stroke lengths are available on a custom basis)
- Start/Stop	profile model: 50...5000 mm, rod model: 50...7600 mm

Output

Voltage	0...10 / 10...0 / -10...+10 / +10...-10 VDC (min. load controller: > 5 kOhms)
Current	4(0)...20 mA / 20...4(0) mA (min/max. load: 0/500 Ohms)
Start/Stop pulse	RS422 serial differential signal

Accuracy

Position measurement:	
- Null/Span adjustment	100 % of electrical stroke (min. range 50 mm)
- Resolution	analog: infinite digital (start/stop): 0.1 mm; 0.01; 0.005 mm (controller dependent)
- Linearity ¹	< ± 0.02 % F.S. (minimum ± 50 µm)
- Repeatability	< ± 0.001 % F.S. (minimum ± 2.5 µm)
- Hysteresis	< 4 µm
- Update time	analog: < 1 ms typical digital (start/stop): controller and stroke dependent
- Ripple	< 0.01 % F.S.

Operating conditions

Magnet speed	any
Operating temperature electronic housing	-40 °C...+80 °C (STR -40 °C...+85 °C)
Operating temperature active stroke	-40 °C...+105 °C
Dew point, humidity	90% rel. humidity, no condensation
Ingress protection ²	profile: IP 65, rod: IP 67, IP 68 for cable outlet
Shock test	100 g single hit, IEC-Standard 60068-2-27
Vibration test	15 g / 10...2000 Hz, IEC-Standard 60068-2-6 (resonance frequencies excluded)
EMC test	Electromagnetic emission EN 61000-6-4 (for use in industrial environment) Electromagnetic immunity EN 61000-6-2 The sensor meets the requirements of the EC directives and is marked with CE

Design, material


Diagnostic display	LEDs beside connector
Profile model:	
Sensor head	aluminum
Sensor stroke	aluminum
Position magnet	magnet slider or removable U-magnet
Rod model:	
Sensor head	aluminum
Rod with flange	stainless steel 1.4301 / AISI 304
-Pressure rating	350 bar, 700 bar peak
Position magnet	Ring magnets, U-magnets

Installation

Mounting position	any orientation
Profile	movable mounting clamps or T-slot nuts in base channel
Rod	threaded flange M18 x 1,5 or 3/4" -16 UNF-3A, hex nut M18
Position magnet	mounting plate and screws from antimagnetic material

Electrical connection

Connection type	6 pin connector
Supply voltage	24 VDC (-15 / +20 %); connection to an approved power supply with energy limitation (IEC 61010-1) resp. class 2 according to National Electric Code (USA)/Canadian Electric Code
- Polarity protection	up to -30 VDC
- Overvoltage protection	up to 36 VDC
Current drain	100 mA typical
Ripple	≤ 0.28 Vpp
Electric strength	500 VDC (DC ground to machine ground)

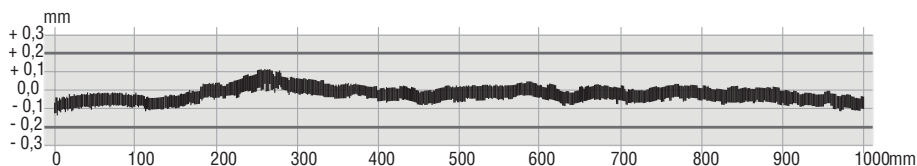

Linearity protocol example

Sensor Temposonics® GP/GH
Stroke length 1000 mm
Tolerance allowed: ± 0.2 mm
Tolerance measured: typical ± 0.09 mm


¹ with position magnet # 251 416-2.

² The IP rating is not part of the UL approval




Temposonics® GP – Stable profile design

Temposonics® GP offers modular construction, flexible mounting configurations and easy installation. Position measurement is contactless via two versions of permanent magnets.

- A sliding magnet running in profile housing rails. Connection with the mobile machine part is via a ball jointed arm to taking up axial forces.
- A floating magnet, mounted directly on the moving machine part, travels over the profile at a low distance. Its air-gap allows the correction of small misalignments at installation.

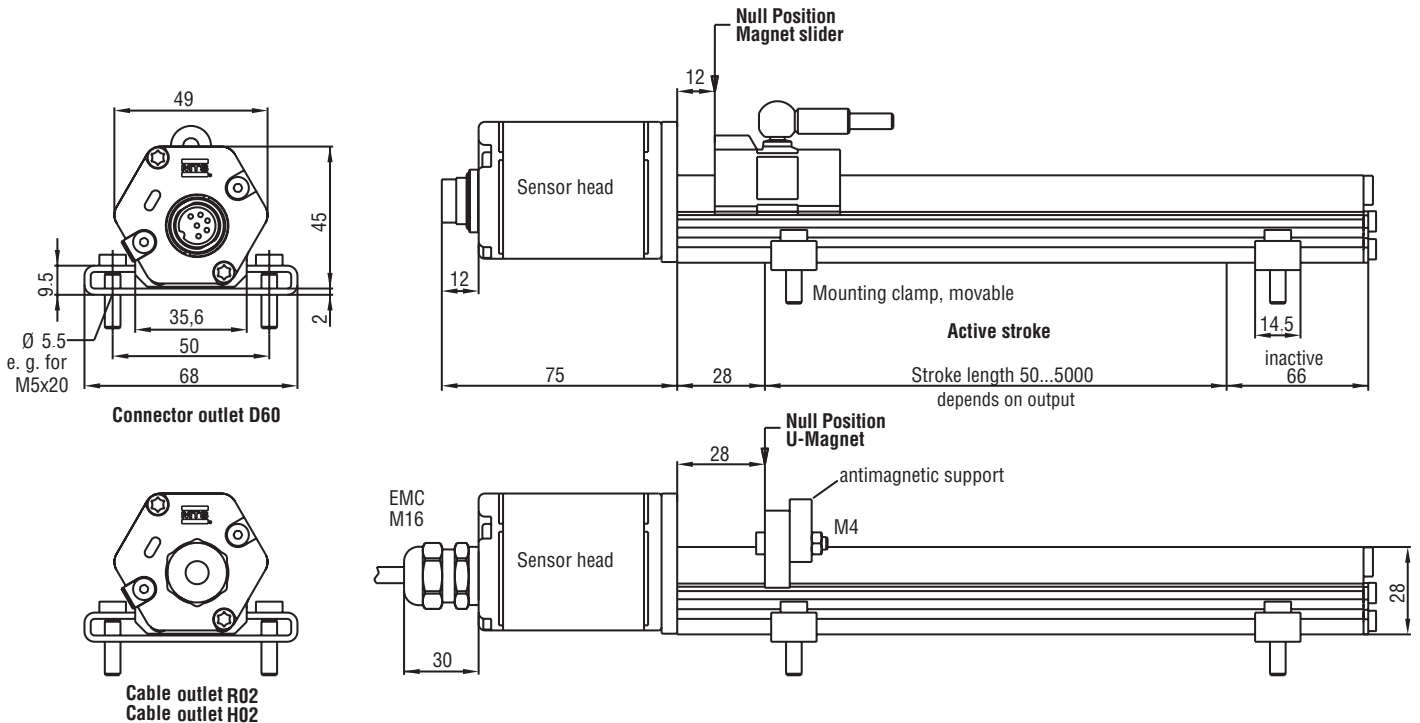

Position magnets (not included in delivery, please order separately)

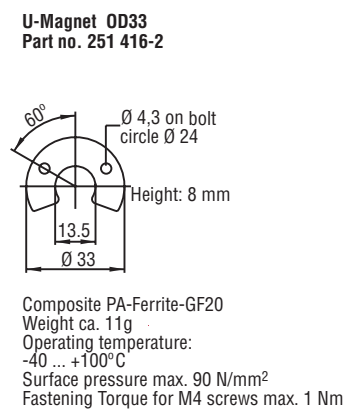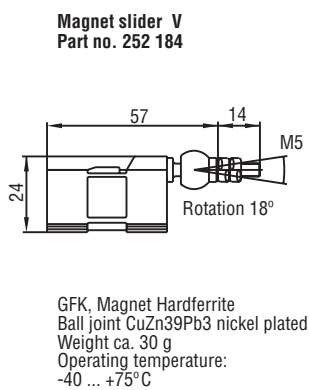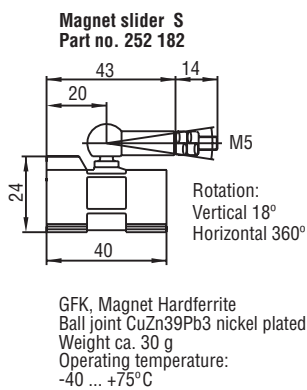

Other position magnets on request.



All dimensions in mm

Temposonics® – High pressure rod design



Temposonics® GH with a pressure-resistant stainless steel flange and sensing rod is suitable for use in hydraulic cylinders and externally in all applications where space is a problem. Position measurement is done via ring or U-magnets travelling along the sensing rod without any mechanical contact.

Advantage...

the completely operable sensor cartridge can be replaced for servicing easily without opening the fluid circuit.

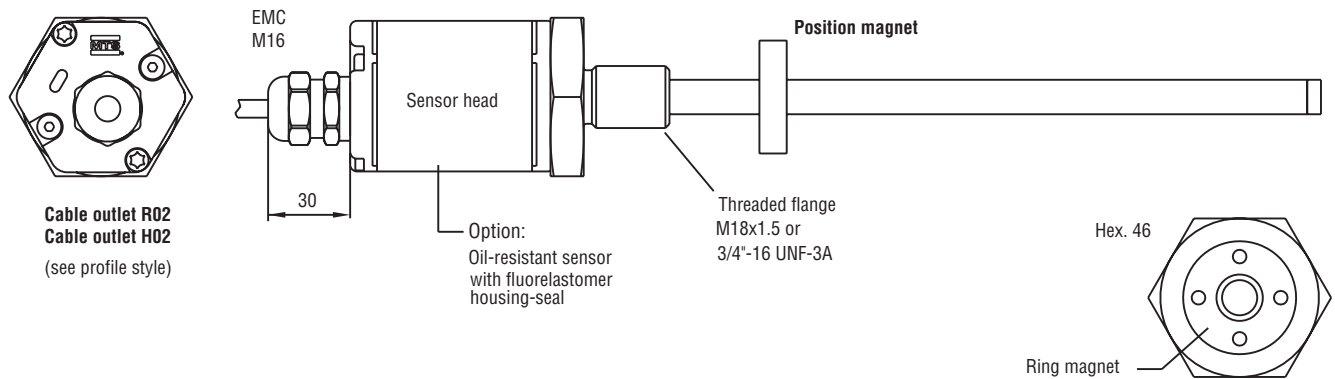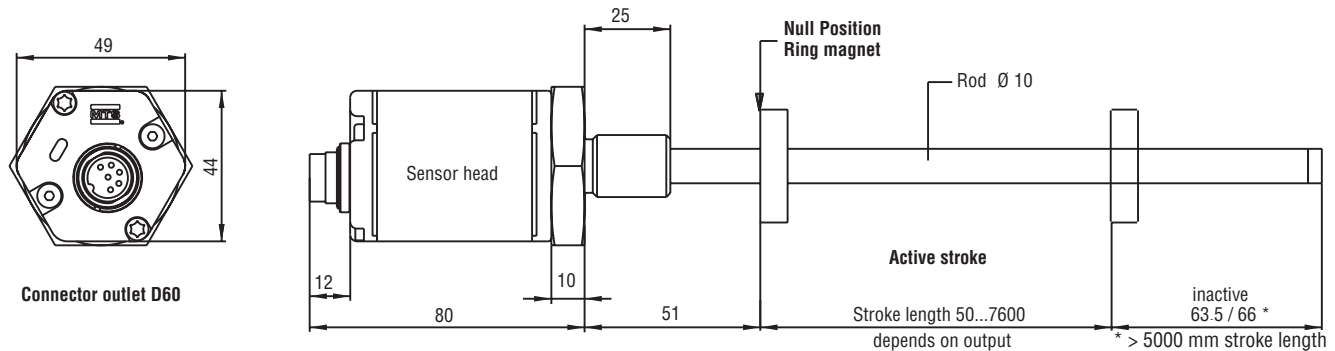

Position magnets (not included in delivery, please order separately)

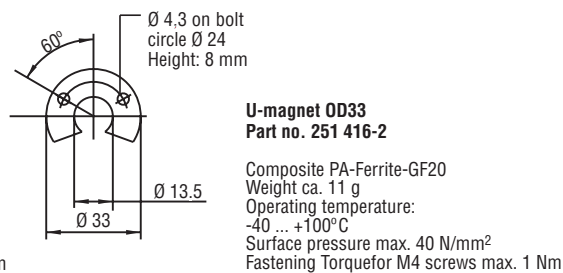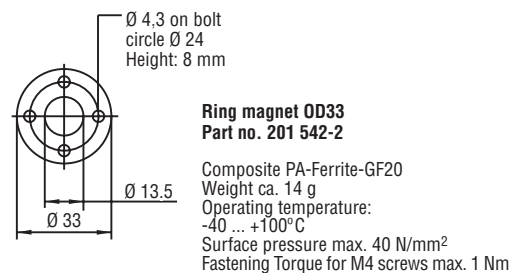

Other position magnets on request.

All dimensions in mm

Temposonics® G-Series – The next sensor generation


MTS Sensors is proud to introduce our new G-Series linear position sensors utilizing our next generation technology platform. G-Series sensors feature a microprocessor-based design with enhanced diagnostics and programmability to maximize backwards compatibility.

Sensor diagnostic display

Integrated LEDs (green/red) provide basic visual feedback for normal sensor operation and troubleshooting.


LED	Green	Red	Description
ON	ON	OFF	Normal function
ON	ON	Flashing	Missing external start signal
ON	ON	ON	Magnet not detected
Flashing	ON	OFF	Serial programming mode

Connector wiring




Pin	Cable	Analog	Digital
Pin 1	GY	V/mA	Stop (-)
Pin 2	PK	DC ground	Stop (+)
Pin 3	YE	USB-programmer	Start (+)
Pin 4	GN	USB-programmer	Start (-)
Pin 5	BN	+24 VDC (-15/+20 %)	
Pin 6	WH	DC ground	

Connectors (not included in delivery, please order separately)



6 pin female connector M16, PG9
Part no.: 370 423

Housing: zinc, nickel-plated
Termination: solder
Contact insert: silver plated
Max. cable-Ø: 6...8 mm




6 pin 90° female connector M16
insert adjustable in 45° positions
Part no.: 370 460

Housing: zinc, nickel-plated
Termination: solder
Contact insert: silver plated
Max. cable Ø: 6...8 mm

Analog output

Temposonics® G-Series with analog outputs provide direct analog outputs including voltage and current, forward or reverse acting. All outputs allow full adjustment of Null and Span setpoints (minimum range 50 mm between setpoints) inside the active electrical stroke length. Since the outputs are direct, no signal conditioning electronics are needed when interfacing with controllers or meters.


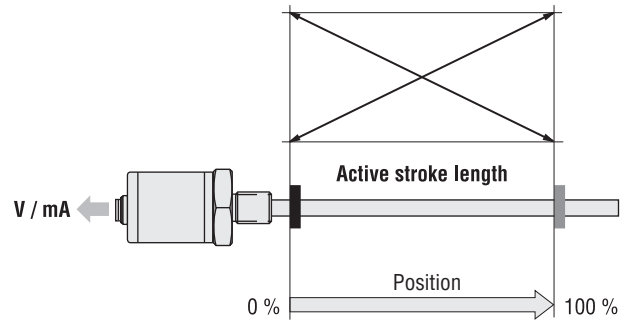


Start/Stop pulse output

The digital Temposonics® G-Series is equipped with a start/stop output. The sensor requires a start signal from an external indicator in the control system and returns a stop signal corresponding to the magnet's position. The time elapsed between the two signals is proportional to the position. Time measurement is done by the control unit and used for calculating the position value.

Option multi-magnet measurement: One Sensor can detect the positions of several magnets simultaneously.

Logic diagram

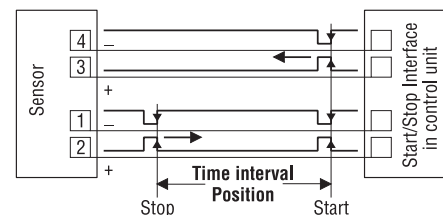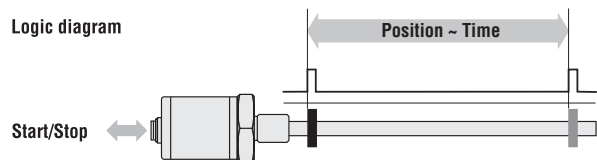


All dimensions in mm



Flexible installation in any position

Profile model

Normally, the sensor is firmly installed - fixed on a straight surface of the machine with movable mounting clamps or M5 screws in base channel - whilst the magnet is mounted at the mobile machine part.



Mounting clamp with screws M5x20
Tightening torque: max. 5 Nm

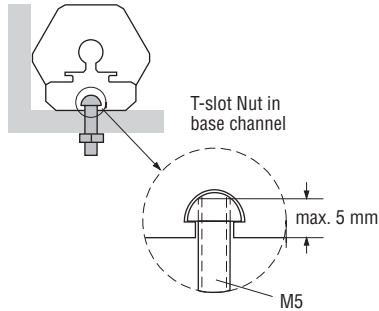

1 U-Magnet
2 Mounting plate and screws non-ferrous material

Rod model


Mount the sensor via flange thread or a hex nut. If possible, non-magnetizable material should be used for mounting support (dimensions as shown). With horizontal mounting, longer sensors (from 1 meter) must be provided with mechanical support.

Hydraulic sealing

Recommended is sealing of the flange facing with O-Ring (e.g. 22,4 x 2,65) in a cylinder cover nut or an O-Ring 15,3 x 2,2 in undercut.


Minimum assembly distance

1. Non-magnetizable material



Recommended hydraulic sealing

2. Magnetizable material

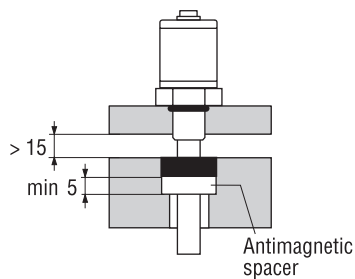


**On delivery:
O-Ring 15,3 x 2,2
See ISO 6149-1**

Cylinder installation


When used for direct stroke measurement in fluid cylinders, the sensor's high pressure, stainless steel rod should be installed into a bore in the piston head/rod assembly as illustrated. That guarantees a longlife and trouble-free operation - independent from the used hydraulic fluid.

The sensor cartridge can be removed from the flange and rod housing while still installed in the cylinder. This procedure allows quick and easy sensor cartridge replacement, without the loss of hydraulic pressure.

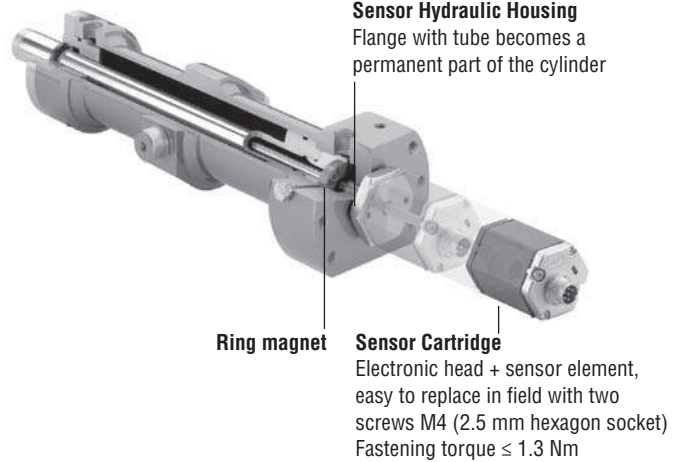

A liquid level sensor

With installation of the position magnet into a float, the application range of G-series extends substantially. These highly precise float sensors supply exact level values or - provided with suitable floats - interface heights e.g. in the process-industry or laboratory technology etc.

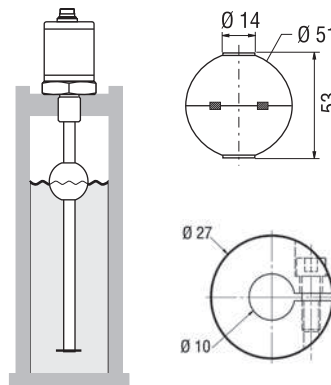

Magnet float (upon request)

Part no. 251 447

- Density 720 kg/m³
- Material 1.4571 polished AISI 316 Ti
- Pressure < 25 bar

Collar

Part no. 560 777

Temposonics® ordering information

G								1			
----------	--	--	--	--	--	--	--	----------	--	--	--

Sensor model
GP - Profile
GH - Hydraulic rod

Form factor
Profile Temposonics® GP:
S - Magnet slider, joint at top
V - Magnet slider, joint at front
M - U-magnet, OD33
Rod Temposonics® GH:
M - Flange M18 x 1,5 (Standard)
V - Flange M18 x 1,5 (Fluorelastomer housing-seal)
S - Flange 3/4" - 16 UNF - 3A

Measuring length
Analog - Profile/Rod 0050...2500 mm
Digital - Profile: 0050...5000 mm / Rod: 0050...7600 mm
Standard: up to 1000 in 50 mm, greater 1000 in 250 mm steps
Other lengths upon request

Connection type
D60 - 6 pin male receptacle M16
R02 - 2 m PVC cable w/o connector, option: R01...R10 (1...10 m)
H02 - 2 m PUR cable w/o connector, option: H01...H10 (1...10 m)

Supply voltage
1 - +24 VDC

Output
V0 = 0...10 VDC
V1 = 10...0 VDC
V2 = -10...+10 VDC
V3 = +10...-10 VDC
A0 = 4...20 mA
A1 = 20...4 mA
A2 = 0...20 mA
A3 = 20...0 mA
R01 = Start/Stop
- Option: R0X = If more than 1 magnet, denotes number (2...9 pcs.)
for start/stop multi-magnet measurement

2 or 3 digits

Stroke length standard (GP):

Stroke length	Ordering steps
≤ 500 mm	25 mm
500...2500 mm	50 mm
2500...5000 mm	100 mm
> 5000 mm	250 mm

Stroke length standard (GH):

Stroke length	Ordering steps
< 500 mm	5 mm
500...750 mm	10 mm
750...1000 mm	25 mm
1000...2500 mm	50 mm
2500...5000 mm	100 mm
> 5000 mm	250 mm

Delivery includes:

On delivery profile model: Sensor, Position magnet, 2 mounting clamps up to 1250 mm
+ 1 clamp for every additional 500 mm

On delivery rod model: Sensor, O-ring, please order magnets separately.

Accessories

Description	Part no.
Magnet slider type »S«	252 182
Magnet slider type »V«	252 184
U-Magnet OD33	251 416-2
Ring magnet OD33	201 542-2
Ring magnet OD25.4	400 533
Magnet float	251 447
Collar	560 777
Hex nut	500 018
Mounting clamp	400 802
T-slot nut M5 for base channel mounting	401 602
6 pin female cable connector M16	370 423
6 pin 90°-female cable connector M16	370 460
PVC-cable 3 x 2 x 0.14 mm ²	530 032
PUR-cable 3 x 2 x 0.25 mm ²	530 052
MTS-Servicetools	
Analog Hand-Programmer G	253 853
Analog USB-Programmer G, incl. power supply 100...240 VAC / 24 VDC, connection cable and CD-ROM	253 145-1
Digital USB-Programmer G, incl. power supply 100...240 VAC / 24 VDC, connection cable and CD-ROM	253 146-1

www.mtssensor.com
www.temposonics-shop.de
Temposonics® Hotline: +49 2351-9587-6000

Mo-Fr 8 am-7 pm / Sa 8 am-12 pm



**MTS Sensor Technologie
GmbH & Co. KG**
Auf dem Schüffel 9
58513 Lüdenscheid, Germany
Tel. + 49-23 51-95 87 0
Fax + 49-23 51-5 64 91
E-Mail: info@mtssensor.de
www.mtssensor.de

MTS Systems Corporation
Sensors Division
3001 Sheldon Drive
Cary, N.C. 27513, USA
Tel. + 1-919-677-0100
Fax + 1-919-677-0200
E-Mail: sensorsinfo@mts.com
www.mtssensors.com

MTS Sensors Technology Corp.
737 Aihara-cho,
Machida-shi, Japan
Tel. + 81-42-775-3838
Fax + 81-42-775-5516
E-Mail: info@mtssensor.co.jp
www.mtssensor.co.jp

Document Part Number: 551383 Revision A (EN) 02/2013

MTS and Temposonics are registered trademarks of MTS Systems Corporation.
All other trademarks are the property of their respective owners.

Printed in Germany. Copyright © 2013 MTS Sensor Technologie GmbH & Co. KG
Alterations reserved. All rights reserved in all media.

No licence of any intellectual property rights is granted. The Information is subject
to change without notice and replaces all data sheets previously supplied.