

**SS270023****FLOW SENSORS • SENSORS FOR WATER**

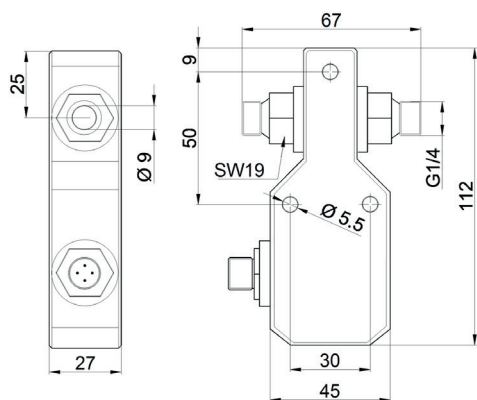
The function of the flow sensor is based on the calorimetric principle. The probe is heated up from the inside a few degrees Celsius in relation to the flow medium, in which it protrudes. When the medium flows, the heat generated in the probe is dissipated through the medium. The temperature within the sensor is measured and compared with the likewise measured medium temperature. From the obtained temperature difference the flow state of each medium can be derived. These sensors are applied in areas such as monitoring of cooling systems, ventilation systems, pump dry running by checking the presence of liquid or gas flows.

**TECHNICAL DATA**

|   |                        |
|---|------------------------|
| Adjustable responding value for flow for liquids    | 0.1 m/s ... 0.1 m/s    |
| Air conditioning / ventilation systems              | No                     |
| Alarm output  | No                     |
| Cooling water circuits                              | Yes                    |
| Degree of protection (IP) of evaluation electronics | IP67                   |
| Degree of protection (IP) of measuring head         | IP67                   |
| Depth   | 112 mm                 |
| Flow rate   | 6 l/min                |
| Flow rate   | 0.1 l/min              |
| For hydraulic applications                          | No                     |
| For pneumatic applications                          | No                     |
| Height  | 67 mm                  |
| Housing design                                      | Cuboid                 |
| Housing material                                    | Plastic                |
| Increased ambient temperatures > 80°C               | No                     |
| Max. output current                                 | 200 mA                 |
| Measuring principle of flow                         | Calorimetric           |
| Medium temperature                                  | 0 °C ... 80 °C         |
| No-load current                                     | 50 mA                  |
| Number of pins                                      | 4                      |
| Operating voltage                                   | 24 V ... 24 V          |
| Pressure resistance                                 | 20 bar                 |
| Readiness delay                                     | 15 ms                  |
| Residual ripple                                     | 10 %                   |
| Response time                                       | 1000 ms                |
| Reverse polarity protection                         | Yes                    |
| Sensing element material                            | Stainless steel 1.4571 |
| Setting procedure                                   | Manual adjustment      |
| Short-circuit-proof                                 | Yes                    |
| Suitable for gases                                  | No                     |

**TECHNICAL DATA**

|                               |                        |
|-------------------------------|------------------------|
| Suitable for liquids          | Yes                    |
| Type of analog output         | 4 mA ... 20 mA         |
| Type of electrical connection | Plug-in connection M12 |
| Type of electrical connection | Plug-in connection     |
| Type of process connection    | G1/4 inch              |
| Type of process connection    | Thread connection      |
| Voltage type                  | DC                     |
| Width                         | 27 mm                  |
| With LED display              | Yes                    |

**DIMENSIONAL DRAWING**

**INSTALLATION**


Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL**

**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.