

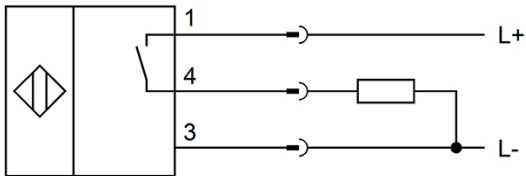
Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts / bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.


TECHNICAL DATA

Devices for hose mounting	NO
Feeding technology	NO
Harsh environmental conditions	NO
Hygienic and wet area	NO
Metallic sensor surface	NO
Oil and cooling lubricants	NO
Ring-shaped sensors	NO
Welding-proof sensors	NO
Active area material of sensor	PA 6.6 (synthetic)
Ambient temperature (min/max)	-25 °C / 70 °C
Ambient temperatures < -25°C	NO
Atmospheric-change resistant (temperature cycle)	NO
Degree of protection (IP)	IP67
High-pressure-proof sensors	NO
Housing design	Cylinder, screw-thread
Housing material	Metal
Housing material	Stainless steel 1.4404
Increased ambient temperatures > 80°C	NO
Material independent sensors (factor 1)	NO
Mechanical mounting condition for sensor	Concise
Pressure-proof	NO
Sensor length	38 mm
Teflon housing	NO
Thread length	23 mm
Thread pitch	0.5 mm
Thread size, metric	5
2x increased switching distance	NO
3x increased switching distance	YES
4x increased switching distance	NO
Cascadable	NO
Connection to amplifier	NO

inductive sensors (plus / super plus)
TECHNICAL DATA

Correction factor (aluminum)	0.4
Correction factor (brass)	0.5
Correction factor (copper)	0.4
Correction factor (stainless steel)	0.75
Correction factor (steel)	1
Distance measuring sensors	NO
Hysteresis	10 %
IO-Link compatible	YES
Increased switching distance	YES
Max. output current	200 mA
No-load current	10 mA
Norm measuring plate	5x5x1
Number of pins	3
Rated control supply voltage U_s at DC (min/max)	10 V / 30 V
Relative repeat accuracy	2 %
Reverse polarity protection	YES
Short-circuit-proof	YES
Suitable for safety functions	NO
Supply voltage (min/max)	10 V / 30 V
Switching distance	1.5 mm
Switching frequency	3000 Hz
Type of electrical connection	Connector M8
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	YES
With monitoring function of downstream devices	NO
Areas inquiry	NO
End position sensing, hydraulic cylinder	NO
Welding area	NO

CONNECTION


Colors: 1 = BN (brown), 3 = BU (blue), 4 = BK (black)

Functions: 1 = L+, 3 = L-, 4 = PNP NO

DIMENSIONAL DRAWING
