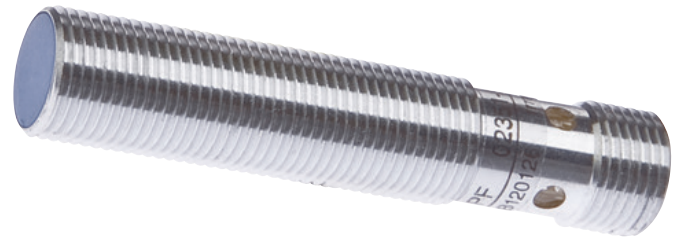



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts / bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.


**TECHNICAL DATA**

Devices for hose mounting	NO
Feeding technology	NO
Harsh environmental conditions	NO
Hygienic and wet area	NO
Metallic sensor surface	NO
Oil and cooling lubricants	NO
Ring-shaped sensors	NO
Welding-proof sensors	NO
Active area material of sensor	PBTP
Ambient temperature (min/max)	-25 °C / 70 °C
Ambient temperatures < -25°C	NO
Atmospheric-change resistant (temperature cycle)	NO
Degree of protection (IP)	IP67
High-pressure-proof sensors	NO
Housing coating	Chromium-plated
Housing design	Cylinder, screw-thread
Housing material	Brass
Housing material	Metal
Increased ambient temperatures > 80°C	NO
Material independent sensors (factor 1)	NO
Mechanical mounting condition for sensor	Quasi-flat
Pressure-proof	NO
Sensor length	60 mm
Teflon housing	NO
Thread length	40 mm
Thread pitch	1 mm
Thread size, metric	12
2x increased switching distance	NO
3x increased switching distance	YES
4x increased switching distance	NO
Cascadable	NO

**inductive sensors (plus / super plus)****TECHNICAL DATA**

Connection to amplifier	NO
Correction factor (aluminum)	0.3
Correction factor (brass)	0.4
Correction factor (copper)	0.25
Correction factor (stainless steel)	0.7
Correction factor (steel)	1
Distance measuring sensors	NO
Hysteresis	10 %
Increased switching distance	YES
Max. output current	200 mA
No-load current	10 mA
Norm measuring plate	18x18x1
Number of pins	3
Rated control supply voltage $U_s$ at DC (min/max)	10 V / 30 V
Relative repeat accuracy	5 %
Reverse polarity protection	YES
Short-circuit-proof	YES
Suitable for safety functions	NO
Supply voltage (min/max)	10 V / 30 V
Switching distance	6 mm
Switching frequency	800 Hz
Type of electrical connection	Connector M12
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	YES
With monitoring function of downstream devices	NO
Areas inquiry	NO
End position sensing, hydraulic cylinder	NO
Welding area	NO

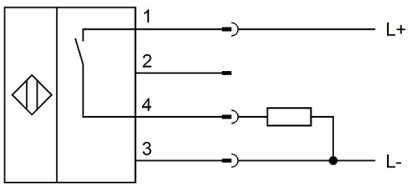**CONNECTION**


**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = n. c., 3 = L-, 4 = PNP NO

**DIMENSIONAL DRAWING**
