

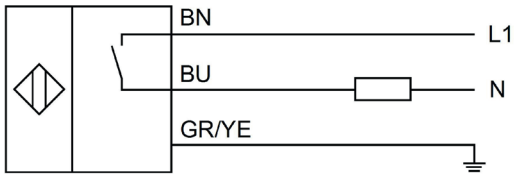
Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.


TECHNICAL DATA

| | |
|--|------------------------|
| Devices for hose mounting | NO |
| Feeding technology | NO |
| Harsh environmental conditions | NO |
| Hygienic and wet area | NO |
| Metallic sensor surface | NO |
| Oil and cooling lubricants | NO |
| Ring-shaped sensors | NO |
| Welding-proof sensors | NO |
| Active area material of sensor | PA 6.6 (synthetic) |
| Ambient temperature (min/max) | -25 °C / 70 °C |
| Ambient temperatures < -25°C | NO |
| Atmospheric-change resistant (temperature cycle) | NO |
| Cable length | 2 m |
| Degree of protection (IP) | IP67 |
| High-pressure-proof sensors | NO |
| Housing coating | Nickel-plated |
| Housing design | Cylinder, screw-thread |
| Housing material | Brass |
| Housing material | Metal |
| Increased ambient temperatures > 80°C | NO |
| Material independent sensors (factor 1) | NO |
| Material of cable sheath | PVC |
| Mechanical mounting condition for sensor | Not flat |
| Pressure-proof | NO |
| Sensor length | 60 mm |
| Teflon housing | NO |
| Thread pitch | 1 mm |
| Thread size, metric | 18 |
| Wire cross section | 0.5 mm ² |
| 2x increased switching distance | NO |
| 3x increased switching distance | NO |

TECHNICAL DATA

| | |
|--|-----------------------|
| 4x increased switching distance | NO |
| Cascadable | NO |
| Connection to amplifier | NO |
| Distance measuring sensors | NO |
| Hysteresis | 15 % |
| Increased switching distance | NO |
| Max. output current | 350 mA |
| Min. output current | 2 mA |
| Norm measuring plate | 18x18x1 |
| Relative repeat accuracy | 5 % |
| Reverse polarity protection | NO |
| Short-circuit-proof | YES |
| Suitable for safety functions | NO |
| Switching distance | 8 mm |
| Switching frequency | 30 Hz |
| Type of electrical connection | Cable |
| Type of switching function | Normally open contact |
| Type of switching output | AC/DC |
| Type of switching output | Two-wire |
| Voltage drop | 5 V |
| Voltage type | AC/DC |
| With LED display | NO |
| With monitoring function of downstream devices | NO |
| Areas inquiry | NO |
| End position sensing, hydraulic cylinder | NO |
| Welding area | NO |

CONNECTION


Colors: BN (brown), BU (blue), GR/YE (green/yellow)

Functions: BN = L+, BU = L-, GR/YE = PE

DIMENSIONAL DRAWING
