

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

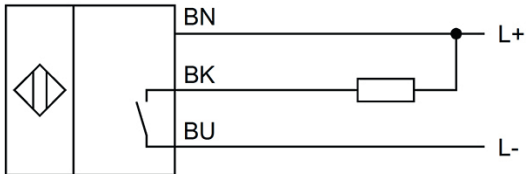

TECHNICAL DATA

Devices for hose mounting	NO
Feeding technology	NO
Harsh environmental conditions	NO
Hygienic and wet area	NO
Metallic sensor surface	NO
Oil and cooling lubricants	NO
Ring-shaped sensors	NO
Welding-proof sensors	NO
Active area material of sensor	PBT
Ambient temperature (min/max)	-25 °C / 70 °C
Ambient temperatures < -25°C	NO
Atmospheric-change resistant (temperature cycle)	NO
Cable length	2 m
Degree of protection (IP)	IP67
High-pressure-proof sensors	NO
Housing coating	Nickel-plated
Housing design	Cylinder, screw-thread
Housing material	Brass
Housing material	Metal
Increased ambient temperatures > 80°C	NO
Material independent sensors (factor 1)	NO
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Concise
Number of wires	3
Pressure-proof	NO
Sensor length	35 mm
Teflon housing	NO
Thread pitch	1 mm
Thread size, metric	12
2x increased switching distance	NO
3x increased switching distance	NO

TECHNICAL DATA

4x increased switching distance	NO
Cascadable	NO
Connection to amplifier	NO
Distance measuring sensors	NO
Increased switching distance	NO
Max. output current	200 mA
Reverse polarity protection	NO
Short-circuit-proof	NO
Suitable for safety functions	NO
Supply voltage (min/max)	10 V / 30 V
Switching distance	3 mm
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	NPN
Voltage type	DC
With LED display	NO
With monitoring function of downstream devices	NO
Areas inquiry	NO
End position sensing, hydraulic cylinder	NO
Welding area	NO

CONNECTION



Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = NPN NO

DIMENSIONAL DRAWING

